



Vendor: Cisco


Exam Code: 400-351

Exam Name: CCIE Wireless Written Exam, v3.1

Version: DEMO

QUESTION 1

Refer to the exhibit, based upon the given configuration which two statement are true? (choose two)

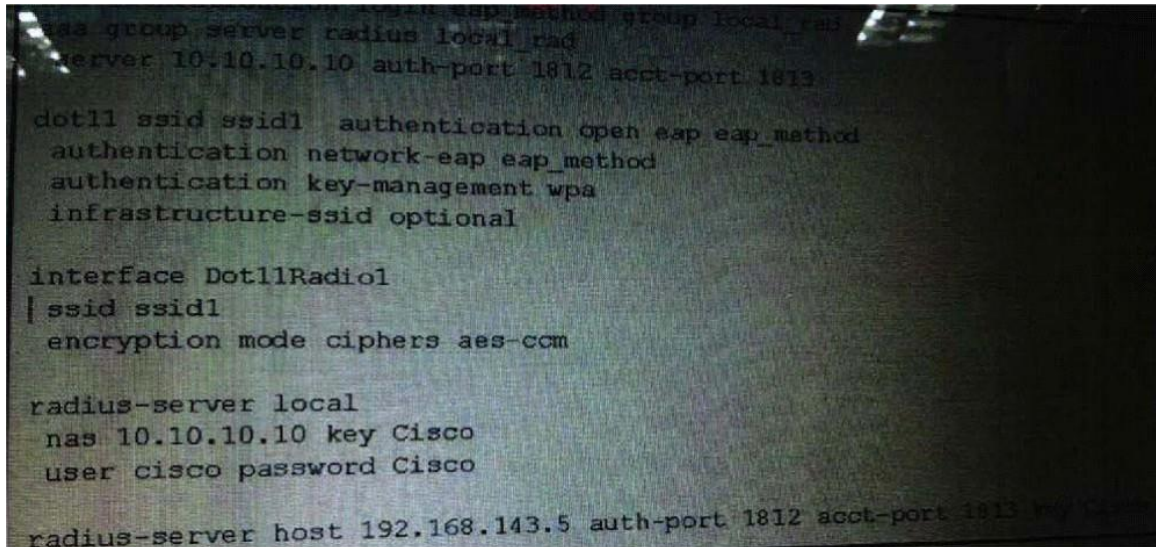

```
radius-server local
nas 10.10.10.10 auth-port 1812 acct-port 1813

dot11 ssid ssid1 authentication open eap eap_method
authentication network-eap eap_method
authentication key-management wpa
infrastructure-ssid optional

interface Dot11Radio1
| ssid ssid1
 encryption mode ciphers aes-ccm

radius-server local
nas 10.10.10.10 key Cisco
user cisco password Cisco

radius-server host 192.168.143.5 auth-port 1812 acct-port 1813 key Cisco
```

- A. local RADIUS server is used
- B. No password is required everyone can join wireless network
- C. Users will be required to provide a username and password for authentication
- D. User will be required to provide a password only order to get access
- E. Remote RADIUS servers is used

Answer: AC

QUESTION 2

Which two features require Network Time Protocol synchronization on the Cisco 5760 WLC?(Choose two)

- A. AP CAPWAP multicast
- B. SNMPv3
- C. AP authentication
- D. Band Select

Answer: BC

QUESTION 3

Refer the exhibit. the created dynamic interfaces are bound to an interface group for a specific WLAN profile in a Cisco Wireless LAN Controller.

You have noticed duplicated multicast streams on the wireless medium for the given WLAN profile.

Which statement is correct?

Layer3 MGID Mapping:

Number of Layer3 MGIDs..... 4

Group address	VLAN	MGID	IGMP/MLD
239.0.1.2	101	12350	IGMP
239.0.1.2	102	12351	IGMP
239.0.1.2	103	12352	IGMP
239.0.1.2	104	12353	IGMP

- A. Globalmulticast mode,global 1Pv6 config,and multicast listener discovery snooping have not been enabled. Enable this to avoid duplicate streams.
- B. Global multicast mode and internet group management protocol snooping have not been enabled . To avoid stream enable both .
- C. The controller creates different multicast groups IDs for each multicast address and VLAN and a result the upstream router sends one copy for each VLAN.
Enable Multicast VLAN to avoid duplicate streams.
- D. The controller always uses layer 3 multicast group 10 for all layer 3 multicast traffic sent to the access point internet group management protocol snooping should be disabled to avoid duplicate streams.

Answer: C

QUESTION 5

Two autonomous Aps are connected to a switch on the same VLAN both APS are configured with the same SSID and WPA2-PSK.

After making configuration changes to one of the APs .spanning tree disabled one of the switch ports into which AP was plugged?

Which two options describe possible reasons that spanning tree disabled a port? (choose Two)

- A. One of the Aps was configured as a universal workgroup bridge.
- B. It is not possible for spanning tree to disable a port. The bridging loop must have been coincidental
- C. Spanning tree was disabled on both Aps
- D. PortFast was enabled on all ports
- E. One of the APs was configured as a standard workgroup bridge.

Answer: AE

QUESTION 6

Which two statement about LAG in the Cisco wireless LAN controller running Aire OS 8.0 are true?(choose two)

- A. LAG bundles all of the crsco WLC distribution system ports into a single 802.3ad port channel.
- B. There can be only one AP-manager interface if LAG is enabled
- C. LAG configuration change take effect immediately after they are configured
- D. Channel negotiation LACP and PAgP are supported

Answer: AB

QUESTION 7


You have configured video stream on a Cisco WLC and users are now viewing the company video broadcast over the wireless network, how can you verify you have video stream configured and working in the Cisco WLC GUI?

- A. The multicast status shows "normalmulticast" in the multicast group detail
- B. The multicast status shows "MediaStream allowed" in the multicast group detail
- C. The WMM state shows "Enabled" in the clients detail
- D. The multicast status shows "multicast-direct allowed" in the multicast group detail

Answer: D

QUESTION 8

Refer to the exhibit. APs on VLAN 2100 can get IP address but cannot register to the WLC. The IP address of the WLC management interface is 24.244.4.227. Which option is the correct DHCP option 43 configuration?

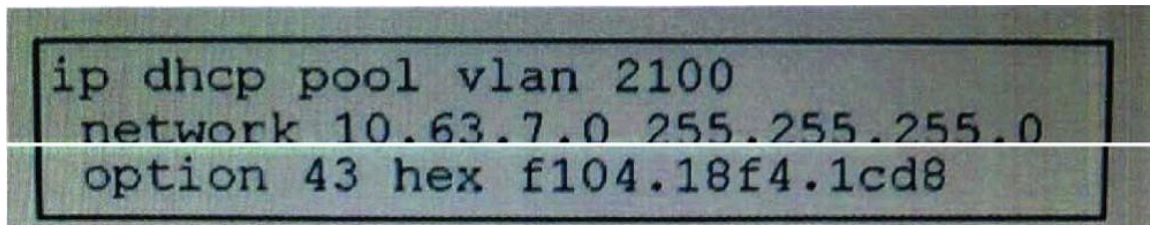

- A. f10412f41cd9
- B. f10418f404227
- C. f10818f41cd0a181cf4a01c
- D. f10418f404e3
- E. f1040a3f0701

Answer: D

QUESTION 9

Which two statements describe characteristics of high availability Cisco 5760 Wireless LAN Controller that uses the stackwise-480 technology? (choose two)

- A. A switch stack has only three WLCs one active WLC and two standby WLCs
- B. If the WLC becomes unavailable the standby assumes the role of the active and continues to keep the stack operational.
- C. A switch stack has only two WLCs both WLCs are in active/active mode
- D. A switch stack has only two WLCs one active and one standby WLC.

Answer: BD

Thank You for Trying Our Product

Braindump2go Certification Exam Features:

- ★ More than **99,900** Satisfied Customers Worldwide.
- ★ Average **99.9%** Success Rate.
- ★ **Free Update** to match latest and real exam scenarios.
- ★ **Instant Download** Access! No Setup required.
- ★ Questions & Answers are downloadable in **PDF** format and **VCE** test engine format.
- ★ Multi-Platform capabilities - **Windows, Laptop, Mac, Android, iPhone, iPod, iPad**.
- ★ **100%** Guaranteed Success or **100%** Money Back Guarantee.
- ★ **Fast**, helpful support **24x7**.



View list of all certification exams: <http://www.braindump2go.com/all-products.html>



Microsoft



ORACLE



JUNIPER
NETWORKS



EMC²
where information lives[®]

10% Discount Coupon Code: BDN2014