

Vendor: Juniper

Exam Code: JN0-334

**Exam Name:** Security, Specialist (JNCIS-SEC)

Version: DEMO

### **QUESTION 1**


Which two solutions provide a sandboxing feature for finding zero-day malware threats? (Choose two.)

- A. Sky ATP
- B. UTM C. JATP
- D. IPS

Answer: AC

## **QUESTION 2**

The output shown in the exhibit is displayed in which format?

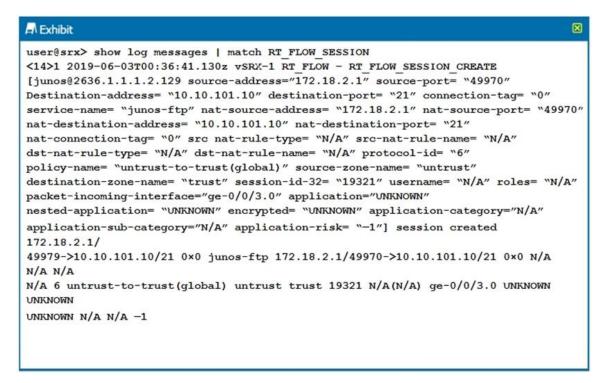

- A. syslog
- B. WELF
- C. binary
- D. sd-syslog

Answer: D

### **QUESTION 3**

You are using the JIMS Administrator user interface to add multiple SRX client devices. You must share common configuration attributes across the SRX clients without having to re-enter those attributes for each SRX client instance.

Which JIMS Administrator feature would be used to accomplish this task?

- A. JIMS automation
- B. JIMS templates
- C. JIMS client profiles
- D. JIMS client defaults

Answer: B

#### **QUESTION 4**

In an Active/Active chassis cluster deployment, which chassis cluster component is responsible for RG0 traffic?

- A. the backup routing engine of the primary node
- B. the master routing engine of the secondary node
- C. the primary node
- D. the secondary node

Answer: C

#### **QUESTION 5**

Your manager asks you to find employees that are watching YouTube during office hours.

Which AppSecure component would you configure to accomplish this task?

- A. AppQoE
- B. AppFW
- C. AppTrack
- D. AppQoS

Answer: C

### **QUESTION 6**


What are two types of collectors for the JATP core engine? (Choose two.)

- A. SNMP
- B. e-mail
- C. Web
- D. telemetry

Answer: BC

### **QUESTION 7**

You have configured your SRX Series device to receive authentication information from a JIMS server. However, the SRX is not receiving any authentication information.

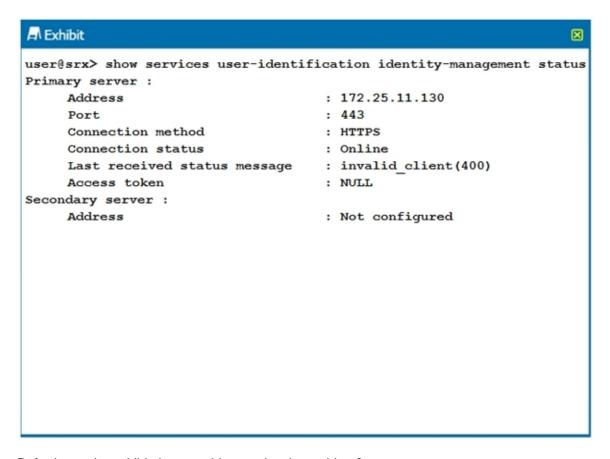

Referring to the exhibit, how would you solve the problem?

- A. Use the JIMS Administrator user interface to add the SRX device as client.
- B. Generate an access token on the SRX device that matches the access token on the JIMS server.
- C. Update the IP address of the JIMS server
- D. Change the SRX configuration to connect to the JIMS server using HTTP.

Answer: B

#### **QUESTION 8**

After a software upgrade on an SRX5800 chassis cluster, you notice that both node0 and node1 are in the primary state, when node1 should be secondary. All control and fabric links are operating normally.

In this scenario, which step must you perform to recover the cluster?

- A. Execute the request system reboot command on node1.
- B. Execute the request system software rollback command on node0.
- C. Execute the request system software add command on node1.
- D. Execute the request system reboot command on node0.

Answer: A

# **Thank You for Trying Our Product**

## **Braindump2go Certification Features:**

- ★ More than 99,900 Satisfied Customers Worldwide.
- ★ Average 99.9% Success Rate.
- ★ Free Update to match latest and real exam scenarios.
- ★ Instant Download Access! No Setup required.
- ★ Questions & Answers are downloadable in PDF format and VCE test engine format.



- ★ Multi-Platform capabilities Windows, Laptop, Mac, Android, iPhone, iPod, iPad.
- ★ 100% Guaranteed Success or 100% Money Back Guarantee.
- ★ Fast, helpful support 24x7.

View list of all certification exams: <a href="http://www.braindump2go.com/all-products.html">http://www.braindump2go.com/all-products.html</a>

























10% Discount Coupon Code: ASTR14