



Vendor: Juniper

Exam Code: JN0-648

Exam Name: Enterprise Routing and Switching,
Professional (JNCIP-ENT)

Version: DEMO

QUESTION 1


What is the correct authentication processing order on EX Series switches when multiple Layer 2 authentication methods are enabled?

- A. captive portal-> MAC RADIUS -> 802.1x
- B. 802.1x-> captive portal -> MAC RADIUS
- C. MAC RADIUS -> 1x -> captive portal
- D. 802.1x -> MAC RADIUS -> captive portal

Answer: D

QUESTION 2

Referring to the exhibit, which TTL value will be sent to the LLDP neighbors?

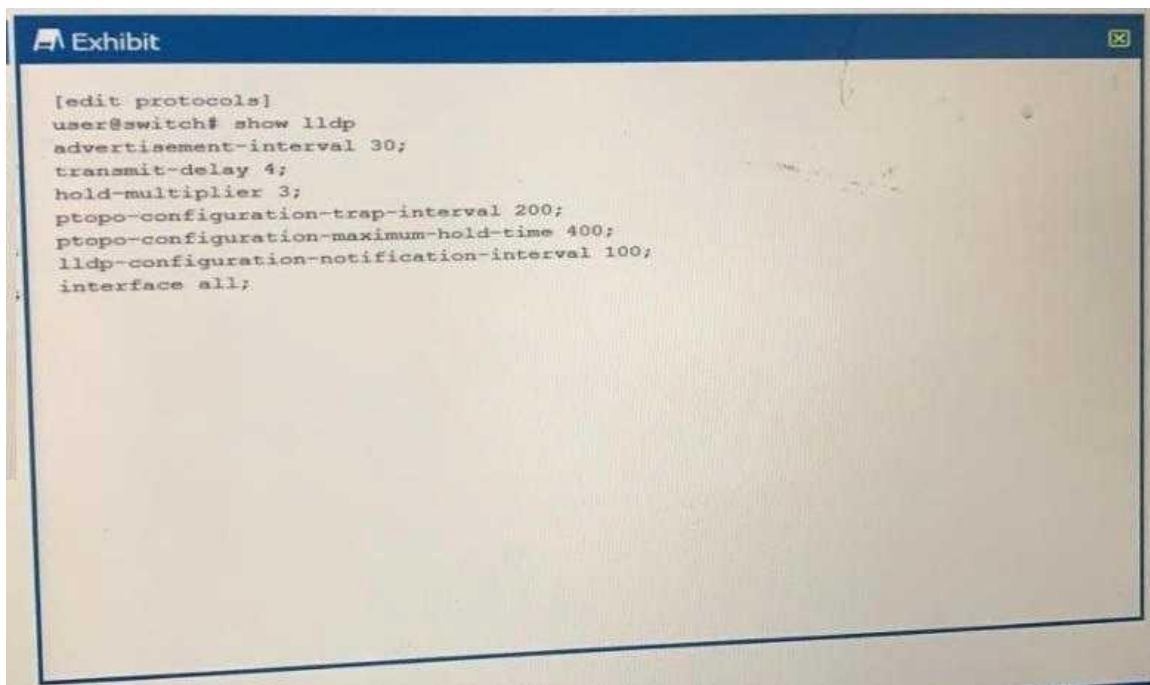


- A. 120 seconds
- B. 200 seconds
- C. 400 seconds
- D. 90 seconds

Answer: A

QUESTION 3

You are authenticating user devices connected to your ex Series switch. You have 802.1X and MAC RADIUS configured for all ports. A user is complaining about the time it takes to connect their non- 802.1X device on ge-0/0/15 using MAC RADIUS authentication. Referring to the exhibit, what should be done to accelerate the authentication process?

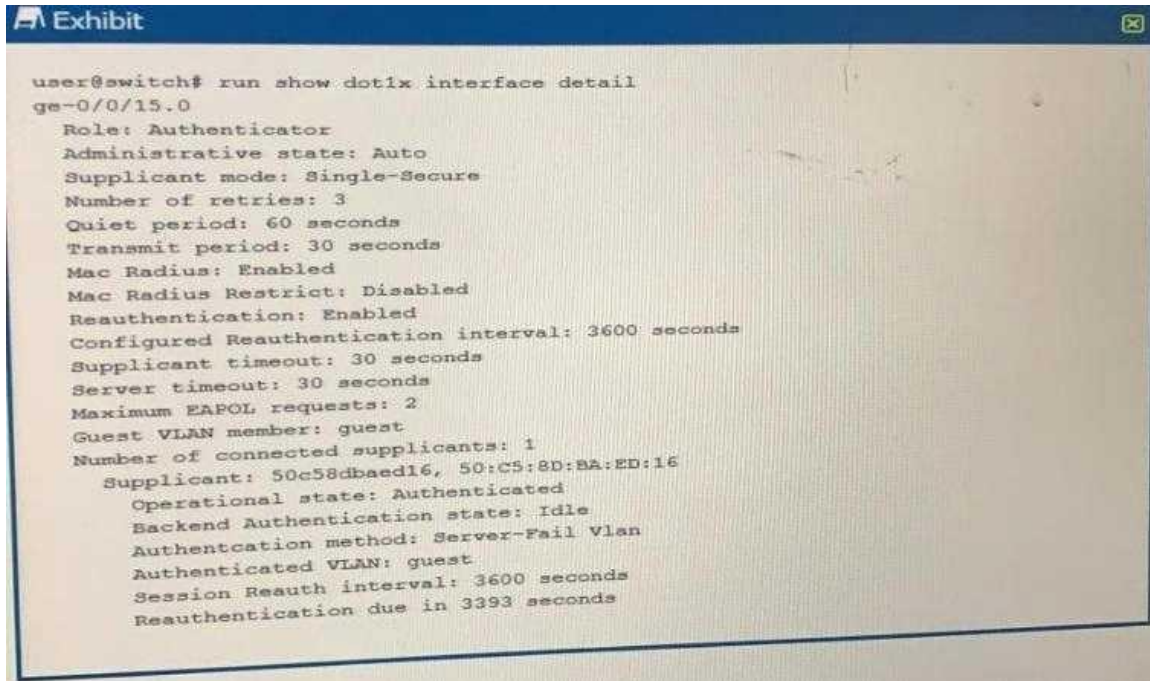

- A. Change the supplicant mode to multiple on ge-0/0/15
- B. Configure the no-reauthentication feature for 802.1X on ge-0/0/15
- C. Configure the restrict feature for MAC RADIUS on ge-0/0/15.
- D. Change the 802.1X retry attempts value to 5 on ge-0/0/15

Answer: A

QUESTION 4

You will to route Layer 3 PVLAN traffic within the secondary VLAN.
What is required to accomplish this task?

- A. a community VIAN
- B. an IRB
- C. an FBF policy
- D. an isolated VLAN

Answer: B

QUESTION 5

You are redistributing static routes into an OSPF area. Which two statement are true is this scenario? (Choose two.)


- A. The external route advertisements have a domain scope.
- B. The area must be stub area.
- C. The area must be the backbone area.
- D. The routes can be advertised in type LSAs.

Answer: CD

QUESTION 6

You are configuring the PVLAN feature on your switches. The PVLAN will span the two EX Series switches shown in the exhibit.

Which three configuration parameters must be enabled on the ports connecting the two switches? (Choose three.)

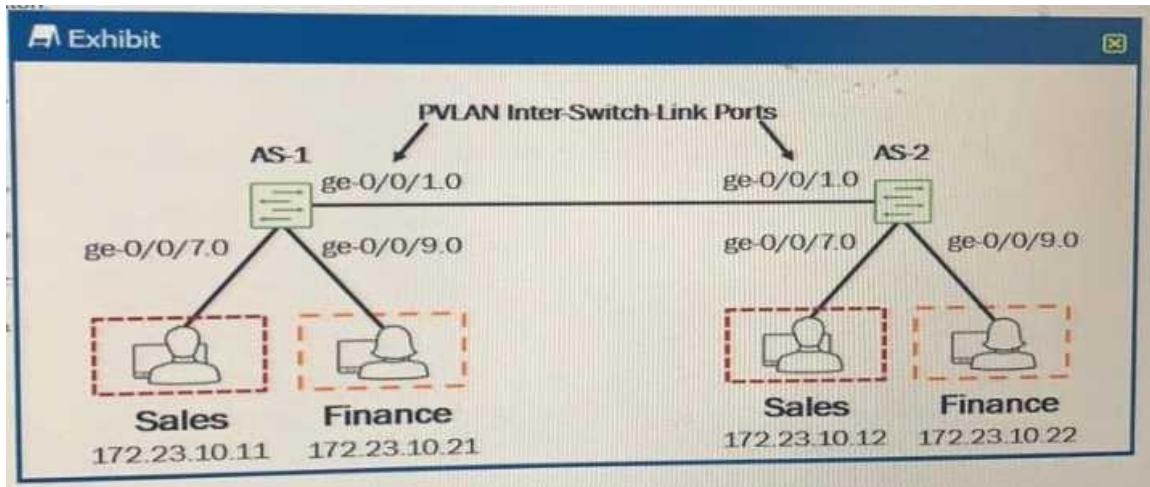

- A. family inet
- B. interface-mode access
- C. interface-mode trunk
- D. family Ethernet-switching
- E. inter-switch-link

Answer: CDE

QUESTION 7

You want to view the VLANs that have been created dynamically using MVRP. Which operational mode command will display this information?

- A. Show mvrp dynamic-vlan memberships
- B. Show mvrp interface
- C. Show mvrp registration-state
- D. Show mvrp applicant-state

Answer: A

Thank You for Trying Our Product

Braindump2go Certification Exam Features:

- ★ More than **99,900** Satisfied Customers Worldwide.
- ★ Average **99.9%** Success Rate.
- ★ **Free Update** to match latest and real exam scenarios.
- ★ **Instant Download** Access! No Setup required.
- ★ Questions & Answers are downloadable in **PDF** format and **VCE** test engine format.
- ★ Multi-Platform capabilities - **Windows, Laptop, Mac, Android, iPhone, iPod, iPad**.
- ★ **100%** Guaranteed Success or **100%** Money Back Guarantee.
- ★ **Fast**, helpful support **24x7**.



View list of all certification exams: <http://www.braindump2go.com/all-products.html>



10% Discount Coupon Code: BDN2014