



Vendor: Network Appliance


Exam Code: NS0-176

Exam Name: Cisco and NetApp FlexPod Implementation and Administration

Version: DEMO

QUESTION 1

You just finished cabling a UCS 5108 chassis to the Fabric Interconnects. Which diagram in the exhibit is cabled correctly according to the CVD guidelines?

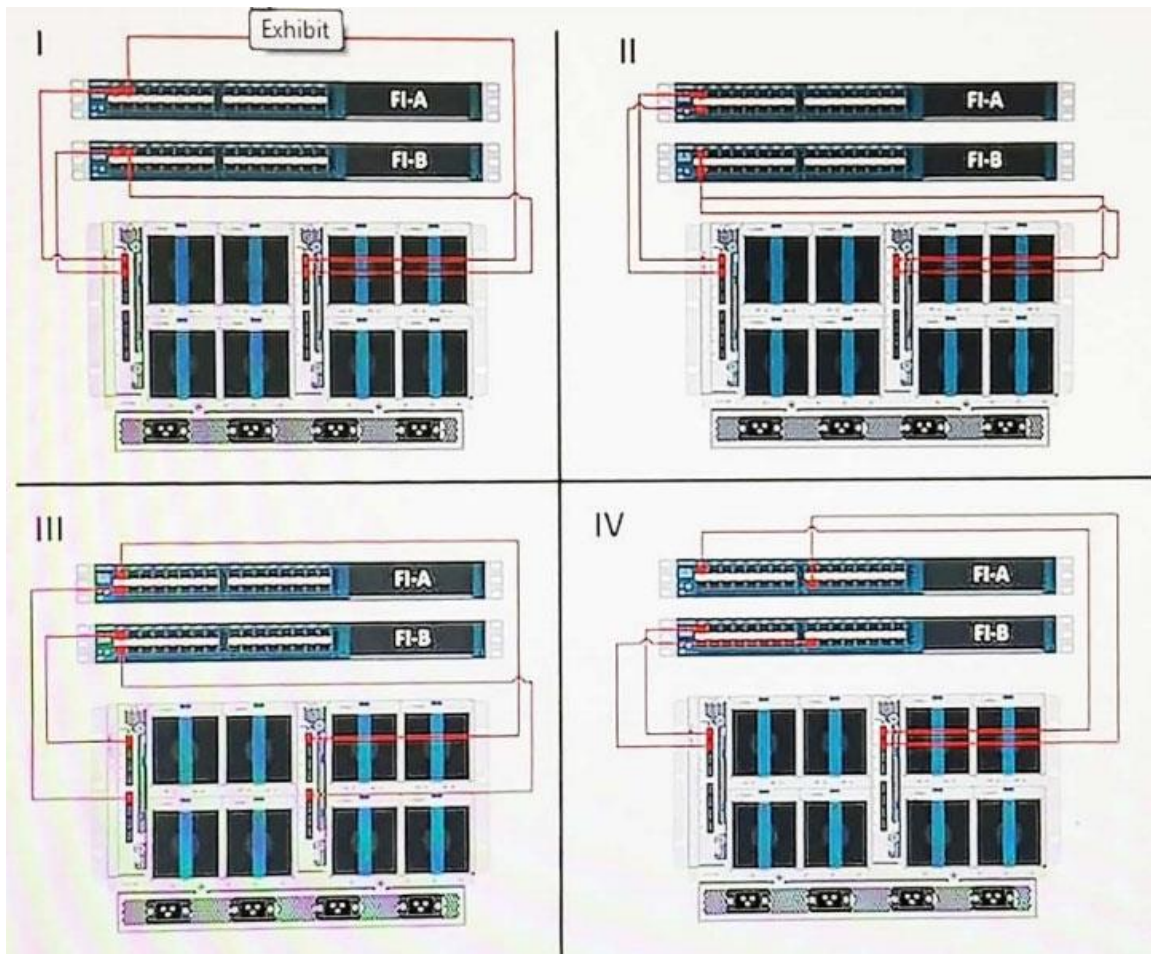

- A. IV
- B. III
- C. I
- D. II

Answer: A

QUESTION 2

Your primary VSM needs to be edited, rebooted, or migrated. You need to initiate a manual switchover to your standby VSM. What command will allow this to occur?

- A. vsm switchover
- B. System switchover
- C. Standby activate
- D. System standby

Answer: B

QUESTION 3

Which hardware component is shown in the exhibit?



- A. GEM
- B. IOM
- C. FI
- D. VIC

Answer: B

QUESTION 4

You are an administrator of a UCS system. You notice that when you apply a setting that requires a reboot, the affected hardware reboots immediately without warning. You would like to reboot to be acknowledged by an administrator instead.


What should you do to accomplish this task?

- A. Create updating templates.
- B. Create a maintenance policy.
- C. Create aa BIOS policy.
- D. Create a scrub policy.

Answer: B

QUESTION 5

Referring to the exhibit, which two diagrams show the correct way to cable a new NetApp clustered Data ONTAP cluster with two nodes? (Choose two.)

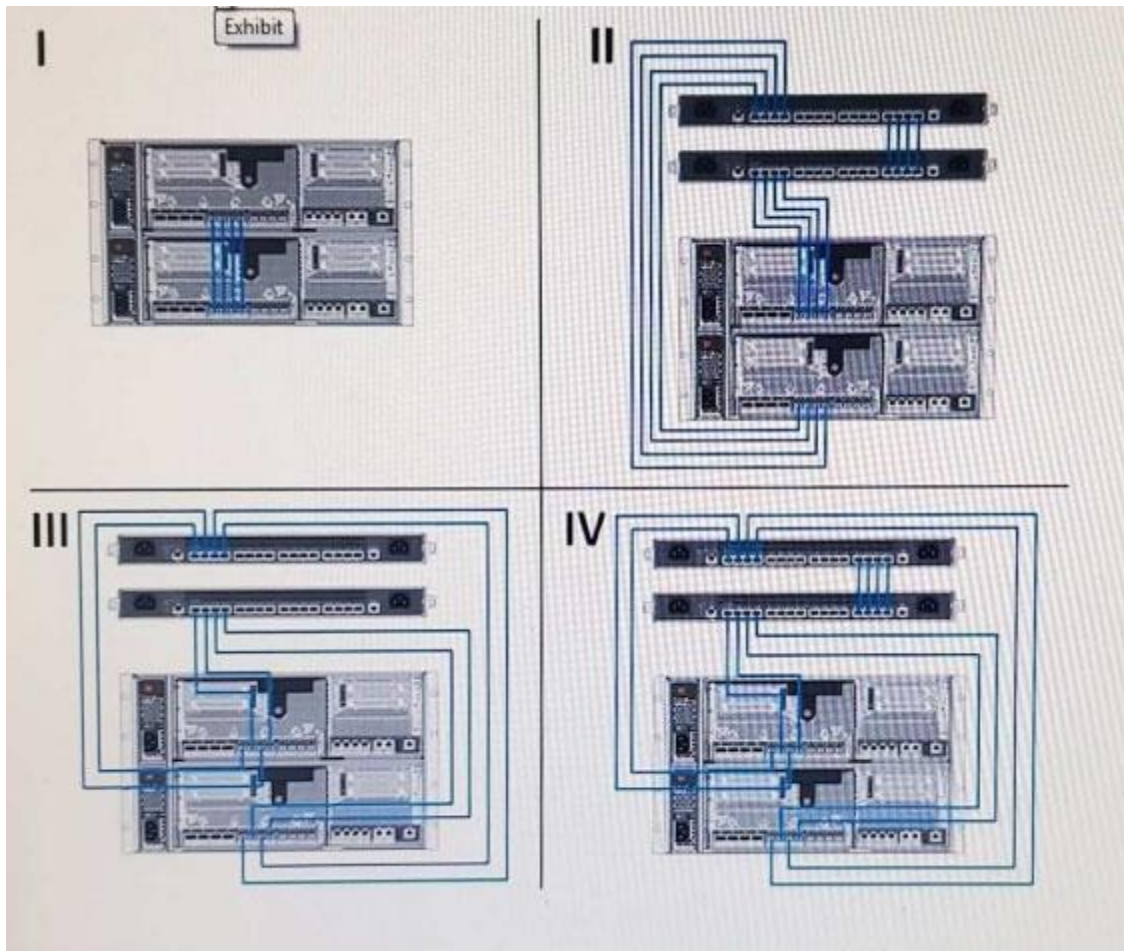

- A. IV
- B. II
- C. I
- D. III

Answer: BD

QUESTION 6

There are 2 chassis tied to a pair of Fabric Interconnects. First chassis, chassis-1, has 1 link between single IOM and Fabric Module. Second chassis, chassis-4, has 4 links between single IOM and Fabric Module. Chassis discovery policy is set for 2 links. Which statement is true?

- A. Both chassis will be added to UCS Domain utilizing all links. No additional steps needed.
- B. Both chassis will be added to UCS Domain utilizing all links only after performing chassis acknowledgment.
- C. Chassis-1 will not be added to UCS Domain. Chassis-4 will be added to UCS domain with all 4 links operating and no additional steps needed.
- D. Chassis-1 will not be added to UCS Domain. Chassis-4 will be added to UCS domain with all 4 links operating after chassis acknowledgement.

Answer: D

QUESTION 7

After deploying a FlexPod solution, which tool would you use to validate a successful installation?

- A. Hardware Universe
- B. Config Advisor
- C. System Manager
- D. UCS Manager

Answer: B

QUESTION 8

The NetApp Virtual Storage Console is used to set which three setting categories on ESXi hosts? (Choose three.)

- A. MPIO Settings
- B. Adapter Settings
- C. Logging Settings
- D. NFS Settings
- E. Security Settings

Answer: ABD

QUESTION 9

A Cisco UCS system is operating in FC End-Host Mode. The fabric Interconnects are uplinked into Nexus 5672UP switches using native FC. The service profiles are unable to boot from SAN using FC. When executing the show flogi database command on the Nexus switches, only the Fabric Interconnect port WWNs are visible. No service profile WWNs are shown. What caused this issue?

- A. The Nexus switches do not have NPV enabled.
- B. The Nexus must be configured for FCoE instead of native Fibre Channel.
- C. The Nexus switches do not have NPIV enabled.
- D. The zoning on the Nexus switches is incorrect.

Answer: C

QUESTION 10

Which FlexPod management tool allows you to manage Storage Virtual Machines (SVMs) and replication relationships?

- A. OnCommand Performance Manager
- B. OnCommand Balance
- C. OnCommand System Manager
- D. OnCommand Insight

Answer: C

QUESTION 11

A customer wants a newly deployed UCS C-Series server's fans to run at the minimum speed required to keep the server cool. The customer is also complaining that the server fans are making too much noise. In this scenario, which type of fan speed should you select under the Power Control Policy of UCSM?

- A. Performance
- B. Balanced
- C. Low Power
- D. Max Power

Answer: B

QUESTION 12

Your customer needs a new Nexus switch that can support at least ten 40GbE ports, and has room for future growth. Your customer would also like the new switch to be Application Centric Infrastructure- ready.

Which switch meets these requirements?

- A. Nexus 7004
- B. Nexus 5672
- C. Nexus 6004
- D. Nexus 9504

Answer: D

QUESTION 13

When trying to configure a Virtual Port Channel (vPC), what might be a cause of the following error when trying to create the vPC domain?

```
Nexus-5548-B(config)# vpc domain 10
^% Invalid command at '^' marker.
Nexus-5548-B(config)#
```

- A. Have not yet turned on the vpc feature using the 'feature vpc' command
- B. The vPC links have to be configured before the vPC domain can be added
- C. The vPC domain has already been configured
- D. vPC domain cannot be configured at the global prompt

Answer: A

Thank You for Trying Our Product

Braindump2go Certification Exam Features:

- ★ More than **99,900** Satisfied Customers Worldwide.
- ★ Average **99.9%** Success Rate.
- ★ **Free Update** to match latest and real exam scenarios.
- ★ **Instant Download** Access! No Setup required.
- ★ Questions & Answers are downloadable in **PDF** format and **VCE** test engine format.
- ★ Multi-Platform capabilities - **Windows, Laptop, Mac, Android, iPhone, iPod, iPad**.
- ★ **100%** Guaranteed Success or **100%** Money Back Guarantee.
- ★ **Fast**, helpful support **24x7**.



View list of all certification exams: <http://www.braindump2go.com/all-products.html>



10% Discount Coupon Code: ASTR14