Braindump2go Guarantee All Exams 100% Pass One Time!

➢ **Vendor: Cisco**

➢ **Exam Code: 300-715**

➢ **Exam Name: Implementing and Configuring Cisco Identity Services Engine (SISE)**

➢ **New Updated Questions from Braindump2go (Updated in Nov.2020)**

Visit Braindump2go and Download Full Version 300-715 Exam Dumps

QUESTION 62
Which statement is not correct about the Cisco ISE Monitoring node?

A. The local collector agent collects logs locally from itself and from any NAD that is configured to send logs to the Policy Service node.
B. Cisco ISE supports distributed log collection across all nodes to optimize local data collection, aggregation, and centralized correlation and storage.
C. The local collector agent process runs only the Inline Posture node.
D. The local collector buffers transport the collected data to designated Cisco ISE Monitoring nodes as syslog; once Monitoring nodes are globally defined via Administration, ISE nodes automatically send logs to one or both of the configured Monitoring nodes.

Answer: C

QUESTION 63
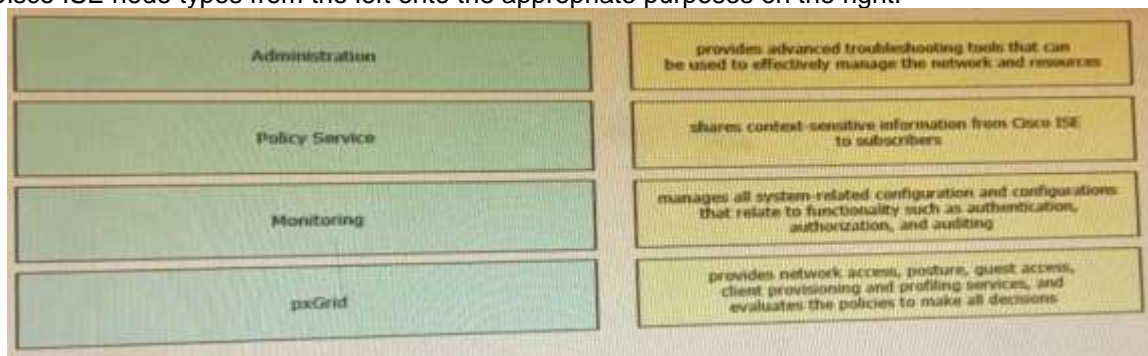The profiling data from network access devices is sent to which Cisco ISE node?

A. Monitoring node
B. Administration node
C. Inline Posture node
D. Policy Service node

Answer: D

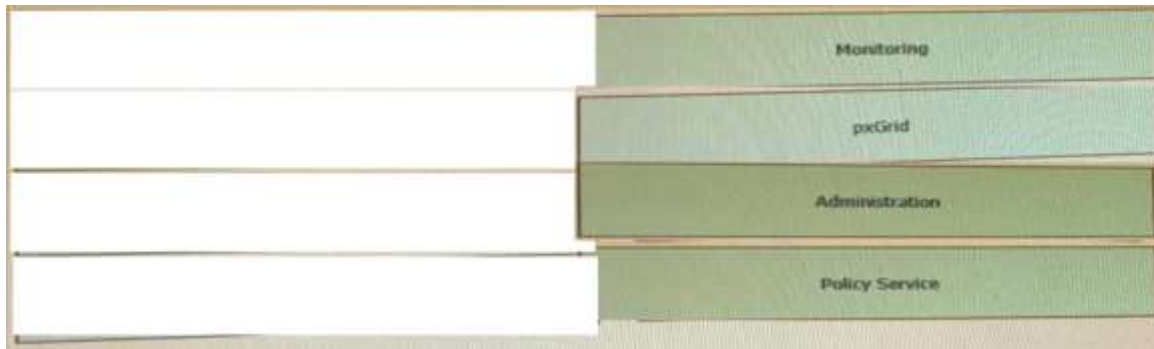**QUESTION 64**
Drag and Drop Question
Drag the Cisco ISE node types from the left onto the appropriate purposes on the right.

Answer:

Explanation:
Monitoring = provides advanced monitoring and troubleshooting tools that you can use to effectively manage your network and resources
Policy Service = provides network access, posture, guest access, client provisioning, and profiling services. This persona evaluates the policies and makes all the decisions.
Administration = manages all system-related configuration and configurations that relate to functionality such as authentication, authorization, auditing, and so on
pxGrid = shares context-sensitive information from Cisco ISE to subscribers
https://www.cisco.com/c/en/us/td/docs/security/ise/1-
4/admin_guide/b_ise_admin_guide_14/b_ise_admin_guide_14_chapter_011.html#ID57

QUESTION 65
Which configuration is required in the Cisco ISE authentication policy to allow Central Web Authentication?

A. MAB and if user not found, continue
B. MAB and if authentication failed, continue
C. Dot1x and if user not found, continue
D. Dot1x and if authentication failed, continue

Answer: A

QUESTION 66
Which portal is used to customize the settings for a user to log in and download the compliance module?

A. Client Profiling
B. Client Endpoint
C. Client Provisioning
D. Client Guest

Answer: C

QUESTION 67
Which term refers to an endpoint agent that tries to join an 802 1X-enabled network?

A. EAP server
B. supplicant
C. client
D. authenticator

Answer: D

QUESTION 68
Which two features are available when the primary admin node is down and the secondary admin node has not been promoted? (Choose two)

A. hotspot
B. new AD user 802 1X authentication
C. BYOD
D. guest AUP

Answer: BC

QUESTION 69
Which protocol must be allowed for a BYOD device to access the BYOD portal?

A. HTTP
B. SMTP
C. HTTPS
D. SSH

Answer: C

QUESTION 70
In which two ways can users and endpoints be classified for TrustSec? (Choose Two.)

A. VLAN
B. SXP
C. dynamic
D. QoS
E. SGACL

Answer: AE

QUESTION 71
Which types of design are required in the Cisco ISE ATP program?

A. schematic and detailed
B. preliminary and final
C. high-level and low-level designs
D. top down and bottom up

Answer: C

QUESTION 72
If there is a firewall between Cisco ISE and an Active Directory external identity store, which port does not need to be open?

A. UDP/TCP 389
B. UDP123
C. TCP 21
D. TCP 445
E. TCP 88

Answer: C