

➤ **Vendor: Cisco**

➤ **Exam Code: 350-601**

➤ **Exam Name: Implementing and Operating Cisco Data Center Core Technologies (DCCOR)**

➤ **New Updated Questions from [Braindump2go](#) (Updated in [Sep/2020](#))**

**[Visit Braindump2go and Download Full Version 350-601 Exam Dumps](#)**

**QUESTION 39**

How do you provision a Cisco UCS chassis?

- A. Associate a service profile template to the chassis.
- B. Configure server pool policies for the chassis
- C. Associate service profiles to each slot.
- D. Select preprovision from the general menu of the chassis.

**Answer: C**

**QUESTION 40**

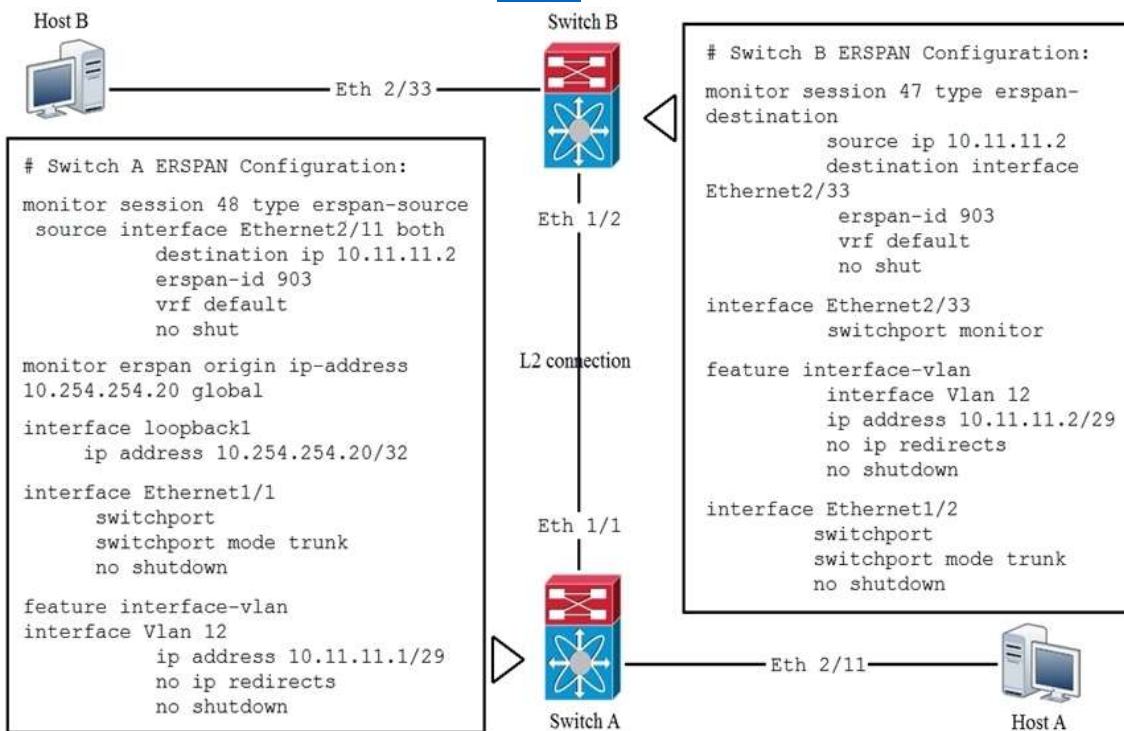
Which virtual MAC address is the default for HSRP version 2 group 10?

- A. 0000.5E00.0110
- B. 0000.0C9F.F00A
- C. 3716.1350.1C0A
- D. 0000.0C9F.F010

**Answer: B**

**QUESTION 41**

Refer to the exhibit. Which statement about the ERSPAN configuration in this environment is true?

**Time!**


- A. The session number of the source of ERSPAN spanned traffic must have a session ID of 47 for the traffic analyzer to receive the traffic.
- B. Host B is the source of ERSPAN spanned traffic and host A is the traffic analyzer.
- C. The session number of the source of ERSPAN spanned traffic must have a session ID of 48 for the traffic analyzer to receive the traffic.
- D. Host A is the source of ERSPAN spanned traffic and host B is the traffic analyzer.

**Answer: D**

**QUESTION 42**

Refer to the exhibit. Which two statements about the routing table of the leaf switch are true? (Choose two.)

```
ACI-Leaf1# show ip route vrf DATACENTER:DC
10.20.1.0/24, ubest/mbest: 1/0, attached, direct, pervasive
  *via 10.0.8.65%overlay-1, [1/0], 4w3d, static
172.16.100.0/24, ubest/mbest: 1/0
  *via 10.1.168.95%overlay-1, [200/5], 3wod, bgp-132, internal, tag 132 (mpls-vpn)
172.16.99.0/24, ubest/mbest: 1/0
  *via 10.0.1.14, [20/0], 3wod, bgp-132, external, tag 200
```

- A. 10.20.1.0/24 is a BD subnet in ACI.
- B. The next hop 10.0.1.14 for route 172.16.99.0/24 is the TEP address of a border leaf in ACI.
- C. 172.16.100.0/24 is a BD subnet in ACI.
- D. The next hop 10.1.168.95 for route 172.16.100.0/24 is the TEP address of a border leaf in ACI.
- E. The next hop 10.0.8.65 for route 10.20.1.0/24 is the TEP address of a border leaf in ACI.

**Answer: AE**

**QUESTION 43**

Which mroute state is created when Bidirectional PIM is deployed at a site?

- A. \*.G
- B. MVPN Type-6
- C. MVPN Type-7
- D. S.G

**Answer:** A

**QUESTION 44**

Refer to the exhibit. Which statement about the default gateway configuration of the vPC is true?

N7K-1

```
interface Vlan165
  no shutdown
  no ip redirects
  ip address 10.16.165.2/27
  no ipv6 redirects
  hsrp version 2
  hsrp 165
    preempt
    priority 150
    ip 10.16.165.1

vpc domain 100
  role priority 100
  peer-keepalive destination 10.1.1.2 source 10.1.1.1
vrf default
  delay restore 60
  peer-gateway
  auto-recovery
  ip arp synchronize
```

N7K-2

```
interface Vlan165
  no shutdown
  no ip redirects
  ip address 10.16.165.3/27
  no ipv6 redirects
  hsrp version 2
  hsrp 165
    priority 50
    ip 10.16.165.1

vpc domain 100
  role priority 200
  peer-keepalive destination 10.1.1.1 source 10.1.1.2
vrf default
  delay restore 60
  peer-gateway
  auto-recovery
  ip arp synchronize
```

- A. Either switch can act as the active default gateway.
- B. N7K-1 acts as the default gateway for all traffic.
- C. N7K-2 forwards traffic that is destined for the default gateway by using the peer link.
- D. N7K-2 acts as the default gateway for all traffic.

**Answer: A**

**QUESTION 45**

Refer to the exhibit. What must be connected to clear the HA NOT READY status?

```
Start time: Mon Apr 15 09:23:01 2019
Last election time: Mon Apr 15 09:24:24 2019
A: UP, PRIMARY
B: UP, SUBORDINATE
A: memb state UP, lead state PRIMARY, mgmt services state: UP
B: memb state UP, lead state SUBORDINATE, mgmt services state: UP
heartbeat state PRIMARY_OK
INTERNAL NETWORK INTERFACES:
eth1, UP
eth2, UP
HA NOT READY
No device connected to this Fabric Interconnect
```

- A. Layer 1-Layer 2 ports
- B. server chassis
- C. management ports
- D. network uplinks

**Answer: B**

**QUESTION 46**

A small remote office is set to connect to the regional hub site via NSSA ASBR.  
Which type of LSA is sent to the remote office OSPF area?

- A. type 7 LSA
- B. type 1 LSA
- C. type 5 LSA
- D. type 3 LSA

**Answer: A**

**QUESTION 47**

Which adjacency server configuration makes two OTV edge devices located in the same site bring up the dual-site adjacency?

A. Nexus-1:

```
interface Ethernet1/2  
ip address 20.1.1.1/24
```

```
interface Overlay200  
otv use-adjacency-server 20.1.1.2 unicast-only  
otv join-interface Ethernet1/2
```

Nexus-2:

```
interface Ethernet1/2  
ip address 20.1.1.2/24
```

```
interface Overlay200  
otv use-adjacency-server 20.1.1.1 unicast-only  
otv join-interface Ethernet1/2
```

B. Nexus-1:

```
interface Ethernet1/2  
ip address 20.1.1.1/24
```

```
interface Overlay200  
otv adjacency-server unicast-only  
otv join-interface Ethernet1/2
```

Nexus-2:

```
interface Ethernet1/2  
ip address 20.1.1.2/24
```

```
interface Overlay200  
otv join-interface Ethernet1/2  
otv adjacency-server unicast-only  
otv use-adjacency-server 20.1.1.1 unicast-only
```

C. Nexus-1:

```
interface Ethernet1/2  
ip address 20.1.1.1/24
```

```
interface Overlay200  
otv adjacency-server unicast-only  
otv join-interface Ethernet1/2
```

Nexus-2:

```
interface Ethernet1/2  
ip address 20.1.1.2/24
```

```
intevrface Overlay200  
otv adjacency-server unicast-only  
otv join-interface Ethernet1/2
```

D. Nexus-1:

```
interface Ethernet1/2  
ip address 20.1.1.1/24
```

```
interface Overlay200  
otv use-adjacency-server 20.1.1.1 unicast-only  
otv adjacency-server unicast-only  
otv join-interface Ethernet1/2
```

Nexus-2:

```
interface Ethernet1/2  
ip address 20.1.1.2/24
```

```
interface Overlay200  
otv use-adjacency-server 20.1.1.2 unicast-only  
otv adjacency-server unicast-only  
otv join-interface Ethernet1/2
```

**Answer: B**

**QUESTION 48**

Refer to the exhibit. The STP priority of N7K-1 and N7K-2 are the lowest in the network.

```
N7K-1
spanning-tree vlan 1-10 priority 8192

vpc domain 100
  role priority 100
  peer-keepalive destination 10.1.1.2 source 10.1.1.1
vrf default
  delay restore 60
  peer-switch
  auto-recovery
  ip arp synchronize

N7K-2
spanning-tree vlan 1-10 priority 8192

vpc domain 100
  role priority 200
  peer-keepalive destination 10.1.1.1 source 10.1.1.2
vrf default
  delay restore 60
  peer-switch
  auto-recovery
  ip arp synchronize
```

Which statement describes STP on the vPC?

- A. N7K-1 and N7K-2 appear as a single STP root.
- B. N7K-1 appears as the STP root.
- C. N7K-1 preempts N7K-2 as the STP root.
- D. N7K-2 appears as the STP root.

**Answer: A**

**QUESTION 49**

The engineer must configure SPAN on a Cisco Nexus 5000 Series Switch to get a capture of the traffic from these applications for an in-depth packet analysis.

Which two SPAN characteristics must be considered? (Choose two.)

- A. SPAN source ports can be monitored in multiple SPAN sessions.
- B. The Ethernet, FC, vFC, port channel, SAN port channel can be used as SPAN source ports.
- C. A SPAN source port cannot be a destination SPAN port.
- D. Only Ethernet, FC, vFC, port channel port types can be used as SPAN source ports.
- E. The rx/tx option is available for VLAN or VSAN SPAN sessions.

**Answer: BC**