



Vendor: Fortinet

Exam Code: NSE7_SDW-7.0

Exam Name: Fortinet NSE 7 - SD-WAN 7.0

Version: DEMO

QUESTION 1

Which are two benefits of using CLI templates in FortiManager? (Choose two.)

- A. You can reference meta fields.
- B. You can configure interfaces as SD-WAN members without having to remove references first.
- C. You can configure FortiManager to sync local configuration changes made on the managed device, to the CLI template.
- D. You can configure advanced CLI settings.

Answer: AD

Explanation:

CLI templates are useful for pushing advanced CLI settings that reference meta fields.

QUESTION 2

Refer to the exhibit.

```
branch1_fgt # diagnose sys sdwan service 3

Service(3): Address Mode(IPV4) flags=0x200 use-shortcut-sla
Gen(5), TOS(0x0/0x0), Protocol(0: 1->65535), Mode(priority), link-cost-
factor(latency), link-cost-threshold(10), health-check(VPN_PING)
Members(3):
  1: Seq_num(3 T_INET_0_0), alive, latency: 101.349, selected
  2: Seq_num(4 T_INET_1_0), alive, latency: 151.278, selected
  3: Seq_num(5 T_MPLS_0), alive, latency: 200.984, selected
Src address(1):
  10.0.1.0-10.0.1.255

Dst address(1):
  10.0.0.0-10.255.255.255

branch1_fgt (3) # show
config service
edit 3
  set name "Corp"
  set mode priority
  set dst "Corp-net"
  set src "LAN-net"
  set health-check "VPN_PING"
  set priority-members 3 4 5
next
end
```

The exhibit shows the SD-WAN rule status and configuration. Based on the exhibit, which change in the measured latency will make T_MPLS_0 the new preferred member?

- A. When T_INET_0_0 and T_MPLS_0 have the same latency.
- B. When T_MPLS_0 has a latency of 100 ms.
- C. When T_INET_0_0 has a latency of 250 ms.
- D. When T_MPLS_0 has a latency of 80 ms.

Answer: D

Explanation:

link-cost-treshold is set to 10 (percent) so the other link must have a latency of less than 90% of the preferred link.

QUESTION 3

Refer to the exhibit, which shows the IPsec phase 1 configuration of a spoke.

```
config vpn ipsec phase1-interface
  edit "T_INET_0_0"
    set interface "port1"
    set ike-version 2
    set keylife 28800
    set peertype any
    set net-device disable
    set proposal aes128-sha256 aes256-sha256 aes128gcm-prfsha256 aes256gcm-prfsha384
chacha20poly1305-prfsha256
    set comments "[created by FMG VPN Manager]"
    set idle-timeout enable
    set idle-timeoutinterval 5
    set auto-discovery-receiver enable
    set remote-gw 100.64.1.1
    set psksecret ENC
6D5rVsaKlMeAyVYtlz95BS24Psew761wY023hnFVviwb6deItSc5ltCa+iNYhuJT8gycfD4+WuszpmuIv8rRzrVh
7DFkHaW2auAAprQ0dHUfaCzjOhME7mPw+8he2xB7Edb9ku/nZEHB0cKLkKYJc/p9J9IMweV2lZUgFjvIpXNxHxpH
LReOFShoH0lSPFKz5IYCVA==
    next
  end
```

What must you configure on the IPsec phase 1 configuration for ADVPN to work with SD-WAN?

- A. You must set ike-version to 1.
- B. You must enable net-device.
- C. You must enable auto-discovery-sender.
- D. You must disable idle-timeout.

Answer: B

Explanation:

For SPOKE you need to configure "net-device Enable" and "auto-discovery-sender Enable".

QUESTION 4

Which best describes the SD-WAN traffic shaping mode that bases itself on a percentage of available bandwidth?

- A. Interface-based shaping mode
- B. Reverse-policy shaping mode
- C. Shared-policy shaping mode
- D. Per-IP shaping mode

Answer: A

Explanation:

Interface-based shaping goes further, enabling traffic controls based on percentage of the interface bandwidth.

QUESTION 5

Refer to the exhibits.

Exhibit A

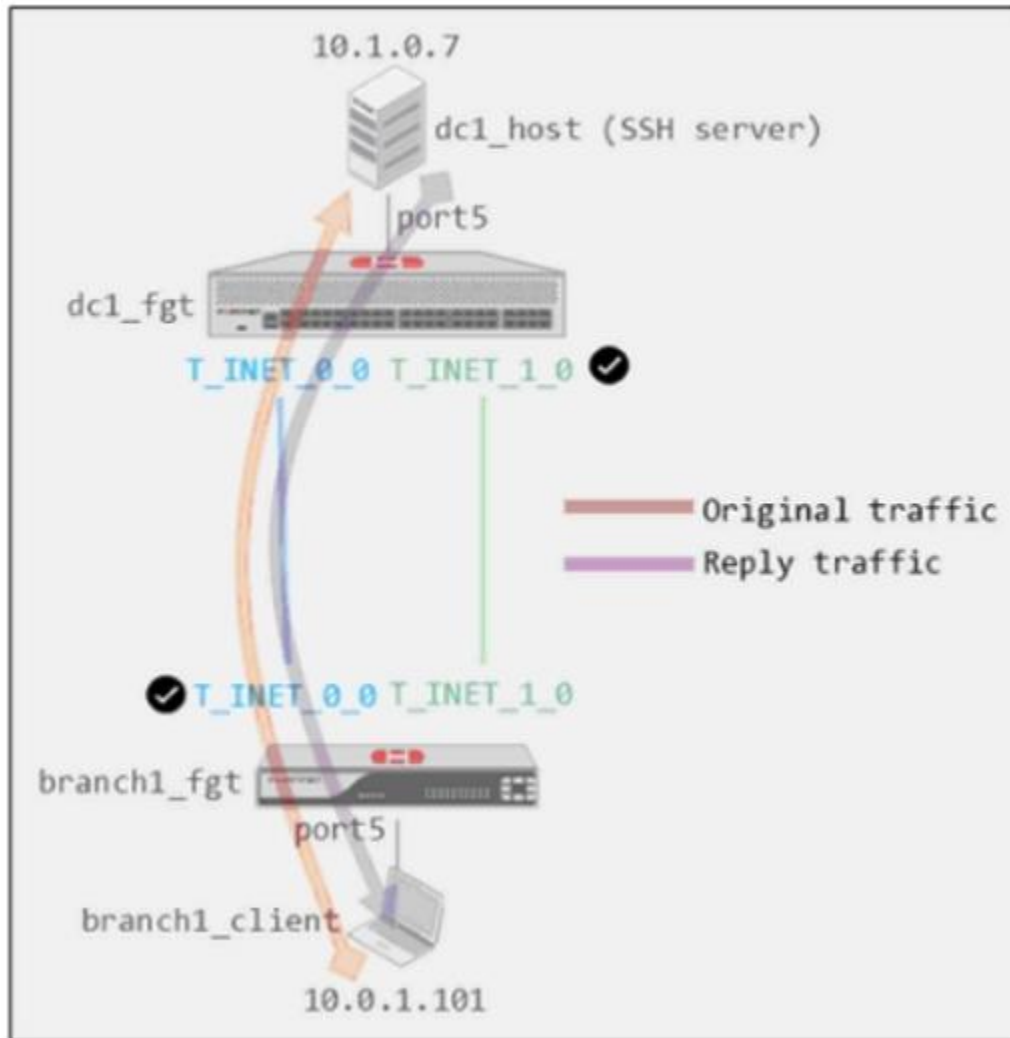


Exhibit B

```
dc1_fgt # show system global
config system global
    set admin-https-redirect disable
    set admintimeout 480
    set alias "FortiGate-VM64"
    set hostname "dc1_fgt"
    set timezone 04
end

dc1_fgt # show system settings
config system settings
    set tcp-session-without-syn enable
    set allow-subnet-overlap enable
    set gui-allow-unnamed-policy enable
    set gui-multiple-interface-policy enable
end
```

Exhibit A shows a site-to-site topology between two FortiGate devices: branch1_fgt and dc1_fgt. Exhibit B shows the system global and system settings configuration on dc1_fgt. When branch1_client establishes a connection to dc1_host, the administrator observes that, on dc1_fgt, the reply traffic is routed over T_INET_0_0, even though T_INET_1_0 is the preferred member in the matching SD-WAN rule.

Based on the information shown in the exhibits, what configuration change must be made on dc1_fgt so dc1_fgt routes the reply traffic over T_INET_1_0?

- A. Enable auxiliary-session under config system settings.
- B. Disable tp-session-without-syn under config system settings.
- C. Enable snat-route-change under config system global.
- D. Disable allow-subnet-overlap under config system settings.

Answer: A

Explanation:

Controlling return path with auxiliary session When multiple incoming or outgoing interfaces are used in ECMP or for load balancing, changes to routing, incoming, or return traffic interfaces impacts how an existing sessions handles the traffic. Auxiliary sessions can be used to handle these changes to traffic patterns.

QUESTION 6

Refer to the exhibit.

```
config system sdwan
  set status enable
  set load-balance source-dest-ip-based
  config zone
    edit "virtual-wan-link"
    next
    edit "SASE"
    next
    edit "underlay"
    next
  end
  config members
    edit 1
      set interface "port1"
      set zone "underlay"
      set gateway 192.2.0.2
    next
    edit 2
      set interface "port2"
      set zone "underlay"
      set gateway 192.2.0.10
    next
  end
  ...
end
```

Which algorithm does SD-WAN use to distribute traffic that does not match any of the SD-WAN rules?

- A. All traffic from a source IP to a destination IP is sent to the same interface.
- B. All traffic from a source IP is sent to the same interface.
- C. All traffic from a source IP is sent to the most used interface.
- D. All traffic from a source IP to a destination IP is sent to the least used interface.

Answer: A

Explanation:

By default when no sd-wan rule is matched, uses a source-IP load balancing algorithm, BUT from the exhibit the has been changed to Source-Destination IP.

QUESTION 7

Refer to the exhibit. Which two statements about the IPsec VPN configuration and the status of the IPsec VPN tunnel are true? (Choose two.)

```
config vpn ipsec phase1-interface
  edit Hub
    set add-route enable
    set net-device disable
    set tunnel-search nexthop
  next
end

diagnose vpn tunnel list name Hub
list ipsec tunnel by names in vd 0
-----
name=Hub ver=1 serial=1 100.64.1.1:0->0.0.0.0:0 dst_mtu=0
bound_if=3 lgwy=static/1 tun=intf/0 mode=dialup/2 encap=none/512 options[0200]-search-
nexthop frag-rfc accept_traffic=1
proxyid_num=0 child_num=2 refcnt=20 ilast=176 olast=176 ad=/0
stat: rxp=22 txp=18 rxb=2992 txb=1752
dpd: mode=on-idle on=0 idle=20000ms retry=3 count=0 seqno=0
natt: mode=none draft=0 interval=0 remote_port=0
run_tally=2
ipv4 route tree:
100.64.3.1 1
100.64.5.1 0
172.16.1.2 1
172.16.1.3 0
```

- A. FortiGate creates separate virtual interfaces for each dial-up client.
- B. FortiGate creates a single IPsec virtual interface that is shared by all clients.
- C. FortiGate maps the remote gateway 100.64.3.1 to tunnel index interface 1.
- D. FortiGate does not install IPsec static routes for remote protected networks in the routing table.

Answer: BC

Explanation:

If net-device is disabled, FortiGate creates a single IPSEC virtual interface that is shared by all IPSEC clients connecting to the same dialup VPN. In this case, the tunnel-search setting determines how FortiGate learns the network behind each remote client.

QUESTION 8

Which diagnostic command can you use to show the member utilization statistics measured by performance SLAs for the last 10 minutes?

- A. diagnose sys sdwan intf-sla-log
- B. diagnose sys sdwan health-check
- C. diagnose sys sdwan log
- D. diagnose sys sdwan sla-log

Answer: A

Explanation:

The diagnose sys sdwan sla-log command shows the member utilization statistics measured by performance SLAs for the last 10 minutes.

Option A, diagnose sys sdwan intf-sla-log, shows the interface utilization statistics measured by performance SLAs for the last 10 minutes.

Option B, diagnose sys sdwan health-check, shows the health check statistics for all interfaces.

Option C, diagnose sys sdwan log, shows all SD-WAN logs.

Thank You for Trying Our Product

Braindump2go Certification Exam Features:

- ★ More than **99,900** Satisfied Customers Worldwide.
- ★ Average **99.9%** Success Rate.
- ★ **Free Update** to match latest and real exam scenarios.
- ★ **Instant Download** Access! No Setup required.
- ★ Questions & Answers are downloadable in **PDF** format and **VCE** test engine format.
- ★ Multi-Platform capabilities - **Windows, Laptop, Mac, Android, iPhone, iPod, iPad**.
- ★ **100%** Guaranteed Success or **100%** Money Back Guarantee.
- ★ **Fast**, helpful support **24x7**.



View list of all certification exams: <http://www.braindump2go.com/all-products.html>



Microsoft



ORACLE



JUNIPER
NETWORKS



EMC²
where information lives

10% Discount Coupon Code: ASTR14

