QUESTION 16
Drag and Drop Question
Drag and drop the correct commands from the night onto the blanks within the code on the left to implement a design that allow for dynamic spoke-to-spoke communication. Not all comments are used.

Answer Area

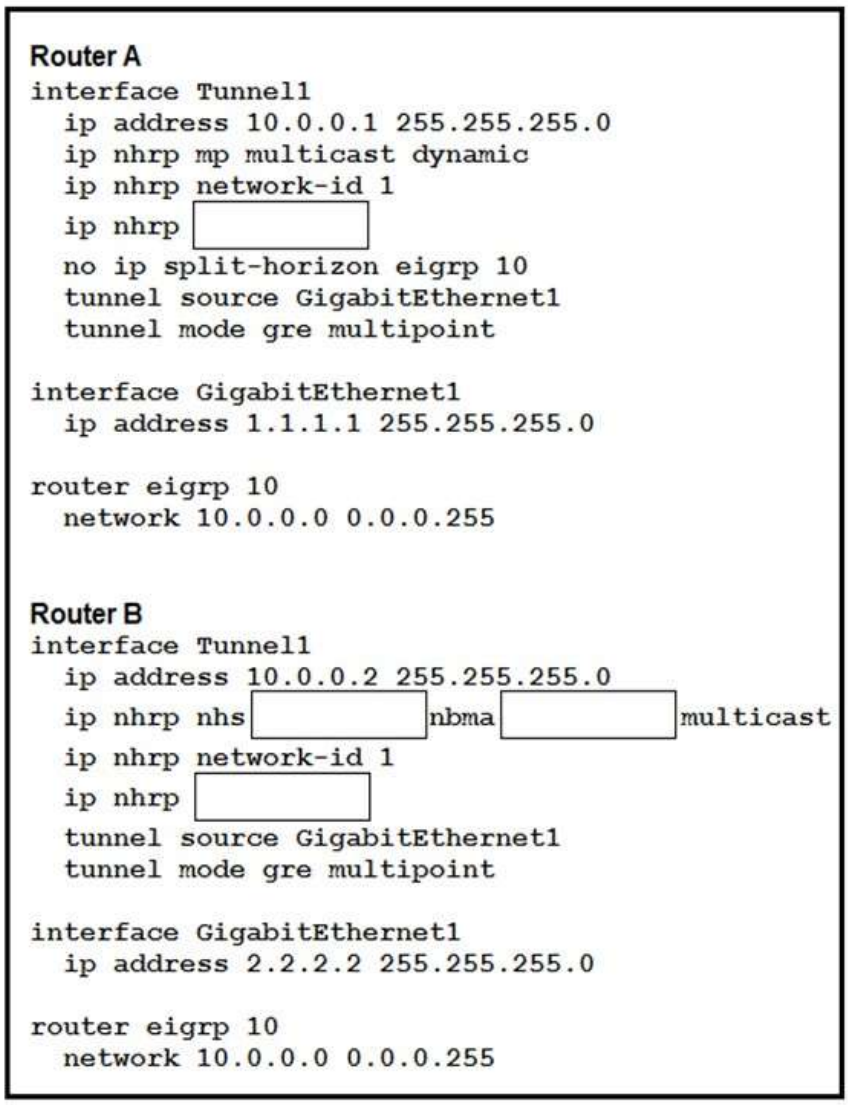

1.1.1.1

10.0.0.1

redirect

shortcut

server-only

Answer:

Answer Area

```
Router A
interface Tunnel1
  ip address 10.0.0.1 255.255.255.0
  ip nhrp mp multicast dynamic
  ip nhrp network-id 1
  ip nhrp [redirect]
  no ip split-horizon eigrp 10
  tunnel source GigabitEthernet1
  tunnel mode gre multipoint

interface GigabitEthernet1
  ip address 1.1.1.1 255.255.255.0

router eigrp 10
  network 10.0.0.0 0.0.0.255


Router B
interface Tunnel1
  ip address 10.0.0.2 255.255.255.0
  ip nhrp nhs [10.0.0.1] nbma [1.1.1.1] multicast
  ip nhrp network-id 1
  ip nhrp [shortcut]
  tunnel source GigabitEthernet1
  tunnel mode gre multipoint

interface GigabitEthernet1
  ip address 2.2.2.2 255.255.255.0

router eigrp 10
  network 10.0.0.0 0.0.0.255
```

[server-only]

Explanation:
https://www.cisco.com/c/en/us/td/docs/ios-xml/ios/sec_conn_dmvpn/configuration/xe-16/sec-conn-dmvpn-xe-16-book/sec-conn-dmvpn-summ-maps.html

QUESTION 17
Which two are characteristics of GETVPN? (Choose two.)

A. The IP header of the encrypted packet is preserved
B. A key server is elected among all configured Group Members
C. Unique encryption keys are computed for each Group Member
D. The same key encryption and traffic encryption keys are distributed to all Group Members

Answer: AD

QUESTION 18
In FlexVPN, what is the role of a NHRP resolution request?

A. It allows these entities to directly communicate without requiring traffic to use an intermediate hop

B. It dynamically assigns VPN users to a group
C. It blocks these entities from to directly communicating with each other
D. It makes sure that each VPN spoke directly communicates with the hub

Answer: A

QUESTION 19
A second set of traffic selectors is negotiated between two peers using IKEv2.
Which IKEv2 packet will contain details of the exchange?

A. IKEv2 IKE_SA_INIT
B. IKEv2 INFORMATIONAL
C. IKEv2 CREATE_CHILD_SA
D. IKEv2 IKE_AUTH

Answer: B

QUESTION 20
Refer to the exhibit. The DMVPN tunnel is dropping randomly and no tunnel protection is configured.

```
HUB#show ip nhrp
10.0.0.2/32 via 10.0.0.2
   Tunnel0 created 00:02:09, expire 00:00:01
   Type: dynamic, Flags: unique registered used nhop
   NBMA address: 2.2.2.1
10.0.0.3/32 via 10.0.0.3
   Tunnel0 created 00:13:25, 01:46:34
   Type: dynamic, Flags: unique registered used nhop
   NBMA address: 3.3.3.1
```

Which spoke configuration mitigates tunnel drops?

A.
```
interface Tunnel0
 ip address 10.0.0.2 255.255.255.0
 no ip redirects
 ip nhrp map 10.0.0.1 1.1.1.1
 ip nhrp map multicast 1.1.1.1
 ip nhrp network-id 1
 ip nhrp holdtime 20
 ip nhrp nhs 10.0.0.1
 ip nhrp registration timeout 120
 ip nhrp shortcut
 tunnel source GigabitEthernet0/1
 tunnel mode gre multipoint
end
```

B.
```
interface Tunnel0
 ip address 10.0.0.2 255.255.255.0
 no ip redirects
 ip nhrp map 10.0.0.1 1.1.1.1
 ip nhrp map multicast 1.1.1.1
 ip nhrp network-id 1
 ip nhrp holdtime 120
 ip nhrp nhs 10.0.0.1
 ip nhrp registration timeout 120
 ip nhrp shortcut
 tunnel source GigabitEthernet0/1
 tunnel mode gre multipoint
end
```

C.
```
interface Tunnel0
 ip address 10.0.0.2 255.255.255.0
 no ip redirects
 ip nhrp map 10.0.0.1 1.1.1.1
 ip nhrp map multicast 1.1.1.1
 ip nhrp network-id 1
 ip nhrp holdtime 120
 ip nhrp nhs 10.0.0.1
 ip nhrp registration timeout 20
 ip nhrp shortcut
 tunnel source GigabitEthernet0/1
 tunnel mode gre multipoint
end
```

D.
```
interface Tunnel0
 ip address 10.0.0.2 255.255.255.0
 no ip redirects
 ip nhrp map 10.0.0.1 1.1.1.1
 ip nhrp map multicast 1.1.1.1
 ip nhrp network-id 1
 ip nhrp holdtime 120
 ip nhrp nhs 10.0.0.1
 ip nhrp registration timeout 150
 ip nhrp shortcut
 tunnel source GigabitEthernet0/1
 tunnel mode gre multipoint
end
```

Answer: D

QUESTION 21
On a FlexVPN hub-and-spoke topology where spoke-to-spoke tunnels are not allowed, which command is needed for the hub to be able to terminate FlexVPN tunnels?

A. interface virtual-access
B. ip nhrp redirect
C. interface tunnel
D. interface virtual-template

Answer: D

QUESTION 22
Which statement about GETVPN is true?

A. The configuration that defines which traffic to encrypt originates from the key server.
B. TEK rekeys can be load-balanced between two key servers operating in COOP.
C. The pseudotime that is used for replay checking is synchronized via NTP.
D. Group members must acknowledge all KEK and TEK rekeys, regardless of configuration.

Answer: A

QUESTION 23
Refer to the exhibit. Which two tunnel types produce the show crypto ipsec sa output seen in the exhibit? (Choose two.)

```
interface: Tunnel1
    Crypto map tag: Tunnel1-head-0, local addr 192.168.0.1

   protected vrf: (none)
   local  ident (addr/mask/prot/port): (0.0.0.0/0.0.0.0/0/0)
   remote ident (addr/mask/prot/port): (0.0.0.0/0.0.0.0/0/0)
   current_peer 192.168.0.2 port 500
     PERMIT, flags={origin_is_acl,}
    #pkts encaps: 0, #pkts encrypt: 0, #pkts digest: 0
    #pkts decaps: 0, #pkts decrypt: 0, #pkts verify: 0
    #pkts compressed: 0, #pkts decompressed: 0
    #pkts not compressed: 0, #pkts compr. failed: 0
    #pkts not decompressed: 0, #pkts decompress failed: 0
    #send errors 0, #recv errors 0

     local crypto endpt.: 192.168.0.1, remote crypto endpt.: 192.168.0.2
     plaintext mtu 1438, path mtu 1500, ip mtu 1500, ip mtu idb GigabitEthernet1
     current outbound spi: 0x3D05D003(1023791107)
     PFS (Y/N): N, DH group: none
```

A. crypto map
B. DMVPN
C. GRE
D. FlexVPN
E. VTI

Answer: BE

QUESTION 24
Which two changes must be made in order to migrate from DMVPN Phase 2 to Phase 3 when EIGRP is configured? (Choose two.)

A. Add NHRP shortcuts on the hub.
B. Add NHRP redirects on the spoke.
C. Disable EIGRP next-hop-self on the hub.
D. Enable EIGRP next-hop-self on the hub.
E. Add NHRP redirects on the hub.

Answer: CE

QUESTION 25
Refer to the exhibit. A customer cannot establish an IKEv2 site-to-site VPN tunnel between two Cisco ASA devices. Based on the syslog message, which action brings up the VPN tunnel?

```
ASA-4-751015 Local:0.0.0.0:0 Remote:0.0.0.0:0 Username:Unknown SA request
rejected by CAC. Reason: IN-NEGOTIATION SA LIMIT REACHED
```

A. Reduce the maximum SA limit on the local Cisco ASA.
B. Increase the maximum in-negotiation SA limit on the local Cisco ASA.
C. Remove the maximum SA limit on the remote Cisco ASA.
D. Correct the crypto access list on both Cisco ASA devices.

Answer: B

QUESTION 26
Refer to the exhibit. Which action is demonstrated by this debug output?

```
%LINK-3-UPDOWN: Interface Tunnel0, changed state to up
NHRP: if_up: Tunnel0 proto 0
NHRP: Tunnel0: Cache update for target 10.1.1.254/32 next-hop 10.1.1.254172.16.10.1
IPSEC-IFC GRE/Tu0(172.16.1.1/172.16.10.1): connection lookup returned 961D220
NHRP: Attempting to send packet via DEST 10.1.1.25
```

A. NHRP initial registration by a spoke.
B. NHRP registration acknowledgement by the hub.
C. Disabling of the DMVPN tunnel interface.
D. IPsec ISAKMP phase 1 negotiation.

Answer: A