

VMware

2V0-41.19 Exam

VMware Professional NSX-T Data Center 2.4 Exam

Question: 1

Which two commands are used to query the arp-table of a logical switch? (Choose two.)

- A. get logical-switch <logical-switch-uuid> arp-table
- B. get logical-switch <vni> arp-table
- C. get logical-switch arp-table <vni>
- D. E. get logical-switch arp-table

Answer: A,B

Question: 2

When a stateful service is enabled for the first time on a Tier-0 Gateway, what happens on the NSX Edge node?


- A. SR and DR doesn't need to be connected to provide any stateful services.
- B. SR is instantiated and automatically connected with DR.
- C. SR and DR is instantiated but requires manual connection.
- D. DR is instantiated and automatically connected with SR.

Answer: B

Question: 3

Refer to the exhibit:

Refer to the exhibit.

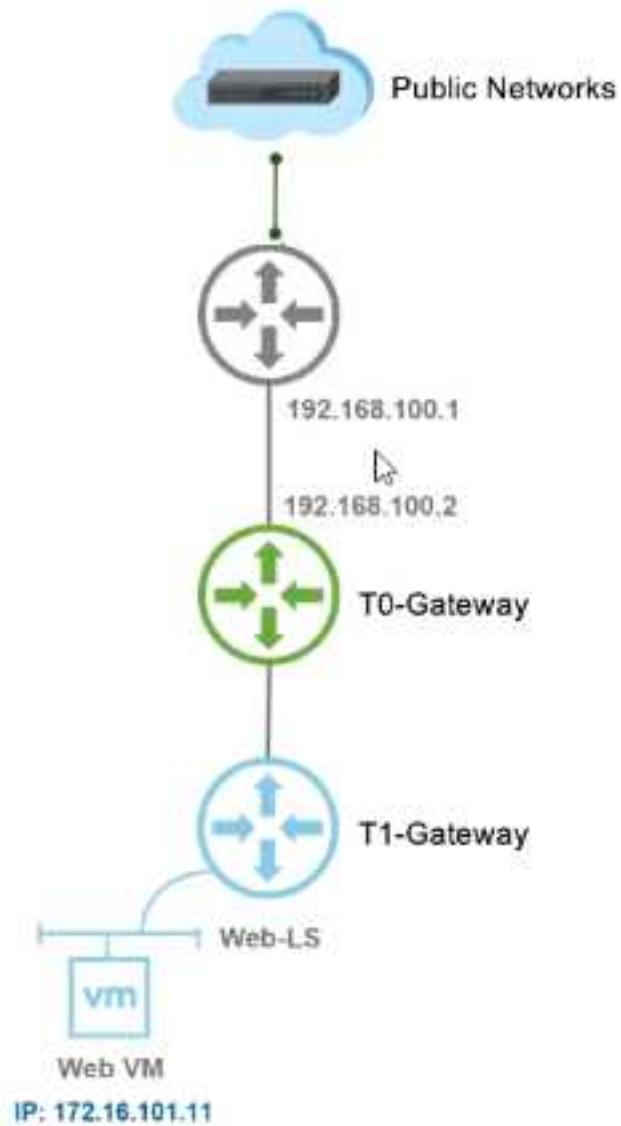

Which NAT type must the NSX-T Data Center administrator create on the Tier-0 or Tier-1 Gateway to allow Web VM to initiate communication with public networks?

- A. Reverse NAT
- B. SNAT
- C. 1:1 NAT
- D. DNAT

Answer: D

Question: 4

A security administrator needs to configure a firewall rule based on the domain name of a specific application.

Which field in a distributed firewall rule does the administrator configure?

- A. Policy
- B. Profile
- C. Service
- D. Source

Answer: B

Explanation:

On the Profile page, choose which profiles to apply the rule to. For most servers, you should apply the rule to all three profiles, because servers are usually continually connected to a single network. For mobile computers in domain environments, you typically need to apply firewall rules only to the Domain profile.

Question: 5

What are two supported VPN configuration types in a NSX-Y Data Center? (Choose two.)

- A. OpenVPN
- B. MPLS
- C. L3VPN
- D. L2VPN
- E. SSLVPN+

Answer: C,E

Question: 6

An NSX administrator is applying QoS to guarantee bandwidth for critical production workloads.

Which three actions must be taken? (Choose three.)

- A. Edit the exported JSON file.
- B. Export transport node NIOC profile.
- C. Create a QoS segment profile.
- D. Specify QoS parameters.
- E. Change Segment QoS profile.
- F. Upload the JSON file and apply configuration.

Answer: B,C,D

Question: 7

A customer is planning deployment of a third-party OpenStack application. Which is used to grant permissions to the application on NSX Manager?

- A. Guest Identity
- B. Cloud Identity
- C. Principal Identity
- D. API Identity

Answer: D

Explanation:

The Enterprise Administrator role gets the same access to the NSX Manager appliance and the API as the NSX Manager admin user. The other NSX roles get read-only access to the NSX Manager appliance and the API.

Question: 8

What are three functions of a Tier-0 Gateway in a multi-tenant service provider environment? (Choose three.)

- A. acts as a default gateway for the tenant workloads
- B. enables east-west connectivity to the tenant workloads
- C. interconnects the Tier-1 gateways of multiple tenants
- D. provides isolation between the tenants
- E. provides first-hop routing for the tenant workloads
- F. enables north-south connectivity to the tenant workloads

Answer: C,D,F

Question: 9

Which CLI command is used to start the NSX Manager virtual machine in the KVM environment?

- A. virsh start <NSX-Manager-Name>
- B. B. virsh poweron <nsx-manager-name>
- C. virsh poweron <nsx-manager-ID>
- D. virsh start <NSX-Manager-ID>

Answer: A

Question: 10

What are the supported N-VDS modes?

- A. DPDK Datapath
- B. Enhanced Datapath
- C. Overlay Datapath
- D. Standard Datapath
- E. Secure Datapath

Answer: B,D

Explanation:

N-VDS Mode: There are 2 modes for N-VDS: Standard or Enhanced Datapath.